

38-013X SVGA CABLE Male-Male, LFH



38-0130	SVGA CABLE Male-Male, LFH,	1m
38-0131	SVGA CABLE Male-Male, LFH,	3m
38-0132	SVGA CABLE Male-Male, LFH,	5m
38-0133	SVGA CABLE Male-Male, LFH,	10m

SVGA CABLES Low Smoke Zero Halogen

SVGA screened cables with moulded 15-pin D-sub miniature connectors and 5.5mm outer diameter 'Low Smoke Zero Halogen' cable. (LFH - 'Low Fire Hazard')

Cable lengths up to and including 10 metres maximum. Cables up to 5 metre cables utilising 30AWG conductors and 10 metre cables utilising 28AWG conductors for lower loss signal transfer.

Cables are designed for standard monitors and widescreen LCD's that require DDC cable, (Display Data Channel).

Features/Specifications

HD15 male connectors

Black cable

Blue 45P PVC Insulated hoods

UL 20276 Low Smoke Zero Halogen Cables (3x Coax with conductors)


Aluminium Foil shield

1m to 5m Cable 30 AWG Conductors 5.5mm O.D.

10m Cable 28 AWG Conductors 6.0mm O.D.

ROHS compliant

Dimensions

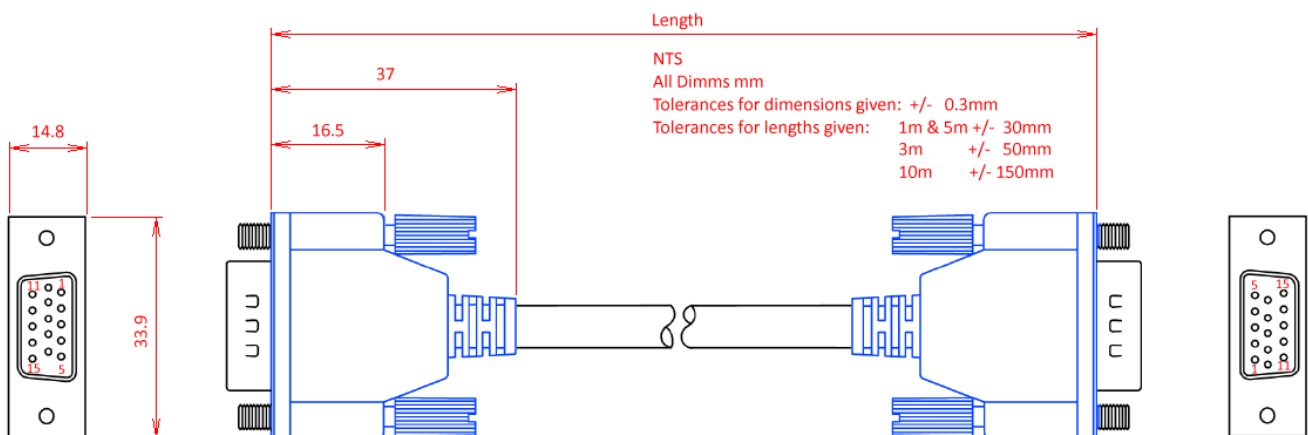

'LFH' is a registered trademark of Canford Audio Limited.